



**AMFEC**

**AMERICAN FOOD EQUIPMENT COMPANY**


**[WWW.AMFEC.COM](http://WWW.AMFEC.COM)**

# **X-RAY INSPECTION**

powered by

**AICON X-RAY**  
IMAGING QUALITY

# SCAN XR-300



A high-tech, advanced X-ray inspection system designed for the quality control of products in unit and collective packaging, including tray, plastic stretch film, cardboard boxes, flowpacks, pouches, doypacks, sachets and more. This system provides effective protection against contamination and various quality defects at all stages of production.



**150 m/min**  
Speed




**10 Gb/s**  
Processing



**1000 PPM**  
Performance

## ADVANTAGES

- **Effective detection** - the highest detection level (POD) of metallic contamination, glass, stones, calcified bones, Teflon, ceramics, dense plastics, product lumps and more, with the lowest false rejection rate (FRR).
- **Multifunctional** - thanks to the industry-record number of image analysis algorithms, AICON X-RAY detectors can efficiently handle any type of application.
- **High-performance** - an innovative data processing method, supporting production lines of up to 1000 PPM.
- **Flexible configuration** - versatile configuration options to suit a wide range of applications.
- **Dual Energy Imaging** - the optional Dual Energy Imaging technology uses two different radiation energies to differentiate between materials in order to more precisely detect contaminants in products that are "difficult" or inhomogeneous in terms of X-ray detection technology (for example, products that have different density, random arrangement or overlap).
- **Traceable** - full product history (including the manufacturing process) and easy access to a detailed archive data for quality control.

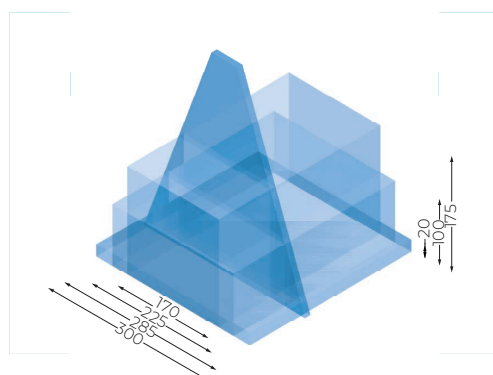

Beam geometry

## FEATURES

- **An intelligent, ergonomic design** - ergonomic solutions ensure comfortable operation and allow for easy and quick system adjustment, should you need to replace individual consumable components. Plus, these systems have been designed to the highest standard of hygiene for easy maintenance regardless of manufacturing conditions.
- **Simple and easy to use** - simple and convenient operation, thanks to the highly ergonomic system and automated product learning.
- **Interface personalization** - flexibility to adjust the control panel to suit individual user requirements, allowing for higher operational comfort.
- **Full MES integration** - intelligent integration into the production environment and vast compatibility with current industry standards guarantee seamless communication of the X-ray detection system with key devices in the production line (including EtherNet/IP, PROFINET, S7, EtherCAT, Modbus-TCP, Profibus, CAN, CANopen, OPC UA, SQL, Siemens Standard and RS).

## TECHNICAL SPECIFICATION

|                              |                                                                 |
|------------------------------|-----------------------------------------------------------------|
| Troughput                    | ≤ 150 m/min                                                     |
| Detection area               | 300 mm at belt level                                            |
| Diode resolution             | 0,4 mm – 0,8 mm, Dual Energy                                    |
| X-ray source                 | 35-100 kV / 1.0-8.0 mA, 500 W                                   |
| Number of scanning beams     | 1                                                               |
| Beam direction               | Vertical                                                        |
| X-ray emission               | <1 µSv/h, the product complies with legal EU directives         |
| Cooling                      | Dry Air Cooling system                                          |
| Operating environment        | Temperature: 0 - 45 ° C, humidity: 30 - 95%, non-condensing     |
| Ingress Protection           | IP65 (optional IP69)                                            |
| Construction material        | Bead-blasted stainless steel 1.4301 (AISI 304)                  |
| Display                      | TFT LCD 15" Touchscreen                                         |
| Operating system             | Windows 10 Enterprise                                           |
| Software                     | AiSoft                                                          |
| Number of product programmes | 1000                                                            |
| Disk space                   | 500 GB for x-ray pictures and internal data storage, expandable |
| Communication interfaces     | Ethernet 10/100/1000 mbps, USB 3.0 for external data storage    |
| Air requirement              | Min. 6 bar for pneumatic rejection systems                      |
| Power supply                 | Single phase, 230 VAC +/- 10%, fuse 12 A                        |
| Dimensions                   | 1600 mm x 1111 mm x 2265 mm (L x B x H)                         |





# CUTTING-EDGE TECHNOLOGY IN X-RAY INSPECTION



---

**Phone:**

208-614-6030

**Mail:**

info@amfec.com

**Website:**

www.amfec.com

**Address:**

4923 East Linden Street  
Caldwell, ID 83605

SEE MORE ON  
OUR WEBSITE

